



CCC

Crown Chimney Connector

CROWN CONTENTS

Technical specifications	Page	3
System components	Page	4
Elbow Offset Dimensions Table	Page	9
Warranty statement	Page	10

CROWN CHIMNEY CONNECTOR - CCC


CHIMNEY LIKE YOU'VE NEVER SEEN IT BEFORE

PRODUCT - CCC CROWN CHIMNEY CONNECTOR - FACTORY-BUILT CHIMNEY CONNECTOR

- CCC is North America's premier solid fuel stovepipe for connecting woodstoves to chimney. Born from Jeremias's world renowned Commercial and Industrial product offerings, CCC brings decades of proven history in the most punishing environments.
- Superior inner wall construction:
 - Utilizing 441 stainless steel, uniquely capable of withstanding highly corrosive environments together with extreme temperatures.
 - Fully welded seams (never cheap lock seams or overlap weld)!
 - The longest joint overlap in the industry (2.2"), providing maximum strength and protection.
 - The thickest inner wall material offered (0.020"), +20% more than competitors consistent with industrial performance!
- CCC utilizes a double-wall construction with air insulation between walls, which provides several benefits:
 - Significantly reduced clearance to combustibles. 5" in comparison to 6" clearance for other products on the market or 18" for single-wall connector pipe.
 - Enhances draft by maintaining higher flue-gas temperatures through the chimney system.
 - Reduces outer surface temperatures.
 - Reduces moisture and creosote build-up.



- CCC's pipe construction allows unmatched installation flexibility, the only UL listed system with all pipes capable of being cut to length (if needed). In addition, adjustable telescopic pipe kits are available to cover the majority of adjustability requirements without any cutting needed.
- Joints secured with included self-drilling screws through pre-cut pilot holes for easy assembly.

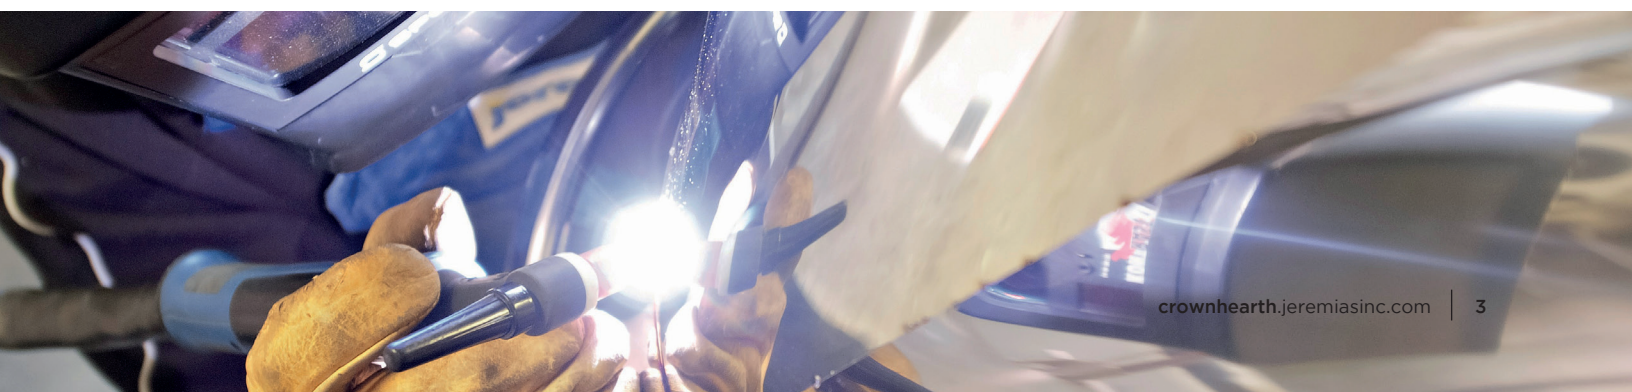


SYSTEM COMPONENTS

CROWN CHIMNEY CONNECTOR

PIPE LENGTHS

Connector pipe length. Includes self-drilling screws to secure joint connection.


DESCRIPTION	A	B	C
CCC6-9L Fixed Length 9"	6"	8"	9.8"
CCC6-19L Fixed Length 19"	6"	8"	19.7"
CCC6-39L Fixed Length 39"	6"	8"	39.4"
CCC8-9L Fixed Length 9"	6"	8"	9.8"
CCC8-19L Fixed Length 19"	6"	8"	19.7"
CCC8-39L Fixed Length 39"	6"	8"	39.4"

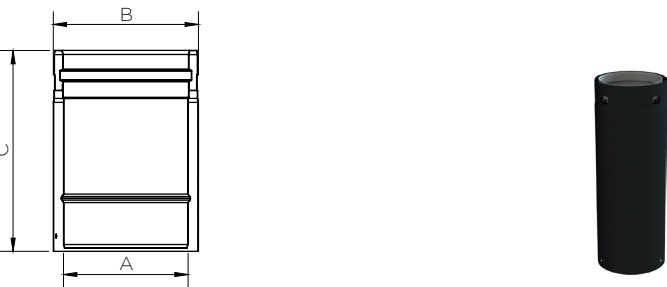

TELESCOPIC LENGTH

Set consisting of 39" pipe length, 39" adjustable length, and finishing band. Adjustability ranges from 42.1" to 73.7" without any cutting needed. Includes sufficient self-drilling screws to secure (3) joint connections.

DESCRIPTION	A	B
CCC6-TL Telescopic Length	6"	7"
CCC8-TL Telescopic Length	8"	9"

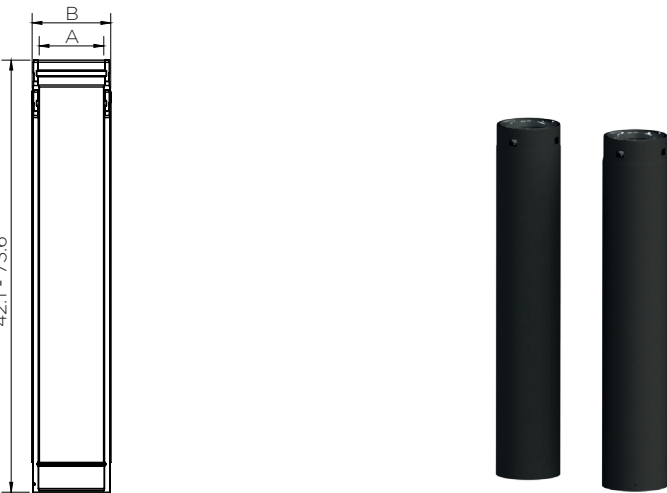

ADJUSTABLE LENGTH

Lengths with slightly larger inner diameter which enable the adjustable length to slide over standard pipe lengths. Includes sufficient self-drilling screws to secure (2) joint connections.


DESCRIPTION	A	B	C
CCC6-9AL Adjustable Length 9"	6"	7"	9.8"
CCC6-19AL Adjustable Length 19"	6"	7"	19.7"
CCC6-39AL Adjustable Length 39"	6"	7"	39.4"
CCC8-9AL Adjustable Length 9"	8"	9"	9.8"
CCC8-19AL Adjustable Length 19"	8"	9"	19.7"
CCC8-39AL Adjustable Length 39"	8"	9"	39.4"



90 DEGREE ELBOW

Includes self-drilling screws to secure joint connection. Elbow offset table included at the end of this catalog.

DESCRIPTION	A	B	C	D
CCC6-90EL 90 Degree Elbow	6"	7"	7.8"	5.6"
CCC8-90EL 90 Degree Elbow	8"	9"	8.8"	6.5"

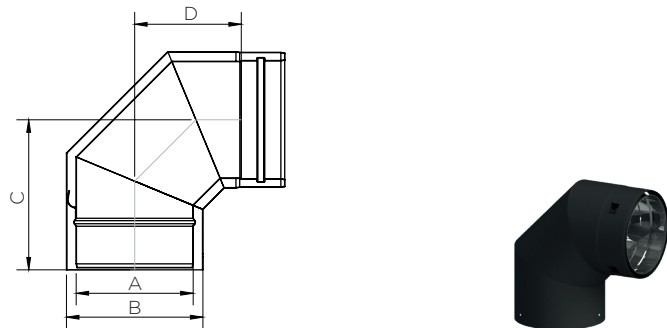


SYSTEM COMPONENTS

CROWN CHIMNEY CONNECTOR

45 DEGREE ELBOW

Includes self-drilling screws to secure joint connection. Elbow offset table included at the end of this catalog.


DESCRIPTION	A	B	C	D
CCC6-45EL 45 Degree Elbow	6"	7	6.3	1.7
CCC8-45EL 45 Degree Elbow	8"	9	7	1.9



30 DEGREE ELBOW

Includes self-drilling screws to secure joint connection. Elbow offset table included at the end of this catalog.


DESCRIPTION	A	B	C	D
CCC6-30EL 30 Degree Elbow	6"	7"	5.7"	0.9"
CCC8-30EL 30 Degree Elbow	8"	9"	6.2"	1"



TEE WITH CAP

90 degree tee fitting with removeable cap for inspection and cleaning. Includes (2) sets of self-drilling screws to secure joint connections.


DESCRIPTION	A	B	C	D
CCC6-T Tee with Cap	6"	7"	15"	9.1"
CCC8-T Tee with Cap	8"	9"	16.9"	10"

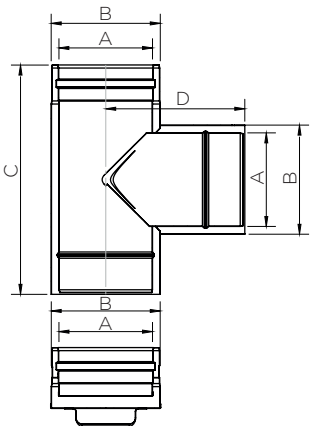

DAMPER LENGTH

Length with built in damper. Used to control draft in the chimney. Includes self-drilling screws to secure joint connection.

DESCRIPTION	A	B
CCC6-DL Damper Length	6"	7"
CCC8-DL Damper Length	8"	9"




SYSTEM COMPONENTS

CROWN CHIMNEY CONNECTOR

TAPERED INCREASER

Use to increase from a smaller diameter to a larger diameter. Includes self-drilling screws to secure joint connection.


DESCRIPTION	A	B	C	D
CCC5-TI6 Tapered Increaser	5"	6"	6"	7"
CCC6-TI8 Tapered Increaser	6"	7"	8"	9"

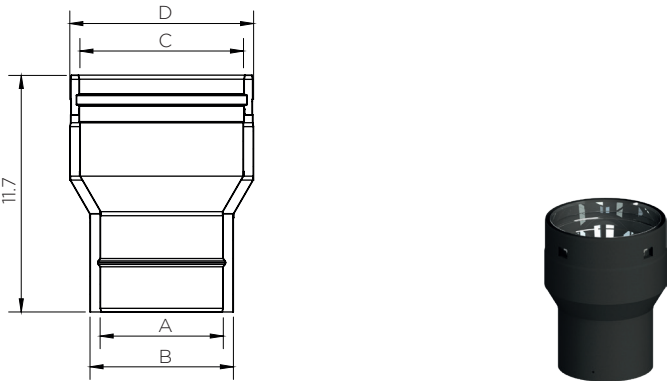

TAPERED REDUCER

Use to reduce from a larger diameter to a smaller diameter. Includes self-drilling screws to secure joint connection.


DESCRIPTION	A	B	C	D
CCC8-TR6 Tapered Reducer	8"	9"	6"	7"

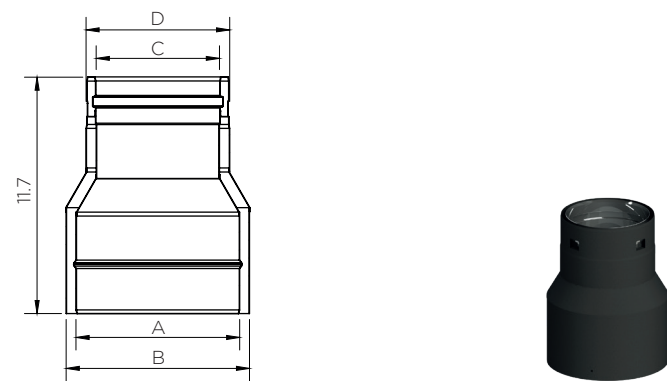

MASONRY ADAPTER

Used to connect to existing masonry chimney or chimney liner. Includes self-drilling screws to secure joint connection.

DESCRIPTION	A	B	C	D
CCC6-MA Masonry Adapter	6"	7"	5.9"	10"
CCC8-MA Masonry Adapter	8"	9"	7.9"	12"

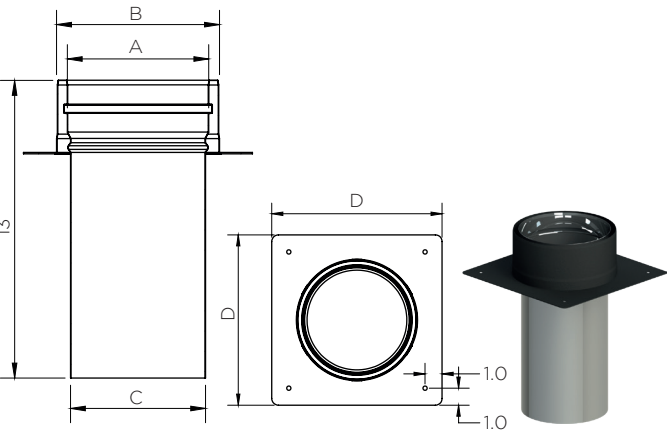

STOVE ADAPTER

Used to connect to appliance outlet. Includes self-drilling screws to secure joint connection.

DESCRIPTION	A	B
CCC6-SA Stove Adapter	6"	7"
CCC8-SA Stove Adapter	8"	9"




SYSTEM COMPONENTS

CROWN CHIMNEY CONNECTOR

STOVE ADAPTER, OVAL

Used to connect to oval appliance outlet. Includes self-drilling screws to secure joint connection.


DESCRIPTION	A	B
CCC6-SAO Stove Adapter Oval	6"	7"
CCC8-SAO Stove Adapter Oval	8"	9"

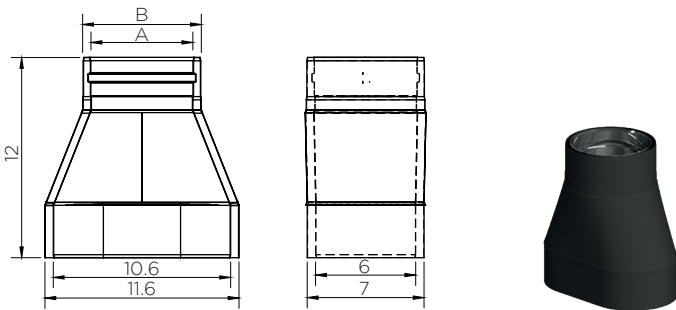

STOVE ADAPTER, RECESSED

Used to connect to recessed appliance outlet. Includes self-drilling screws to secure joint connection.


DESCRIPTION	A	B	C
CCC6-SAR Stove Adapter Recessed	6"	7"	6"
CCC8-SAR Stove Adapter Recessed	8"	9"	8"

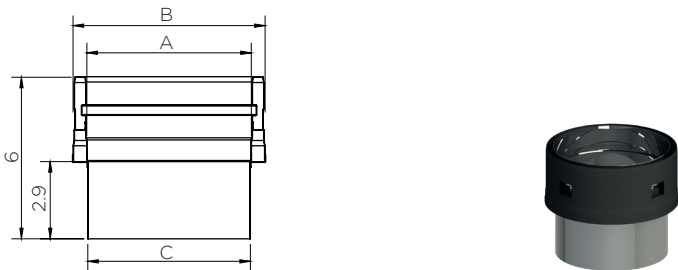

TEE CAP

Sold as a replacement in case of loss or damage to the tee cap included with the "Tee with cap".


DESCRIPTION	A	B
CCC6-TC Tee Cap	6"	7"
CCC8-TC Tee Cap	8"	9"



PIPE SUPPORT

Vertically supports connector pipe. Distance to wall is adjustable by cutting.

DESCRIPTION	A
CCC6-PS Pipe Support	7"
CCC8-PS Pipe Support	9"

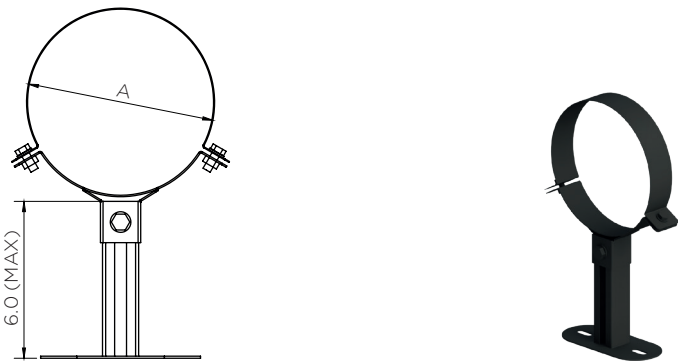



SYSTEM COMPONENTS

CROWN CHIMNEY CONNECTOR

FINISHING BAND

Cosmetic band used to cover the transition from connector pipe to chimney pipe. Included with telescopic length kit.

DESCRIPTION	A
CCC6-FB Wide Finishing Band	7"
CCC8-FB Wide Finishing Band	9"




ELBOW OFFSET DIMENSIONS TABLE

CROWN CHIMNEY CONNECTOR

LENGTH BETWEEN OFFSETS	30° ELBOWS				45° Elbows				90° Elbows			
	6"Ø		8"Ø		6"Ø		8"Ø		6"Ø		8"Ø	
	RISE	OFFSET	RISE	OFFSET	RISE	OFFSET	RISE	OFFSET	RISE	OFFSET	RISE	OFFSET
No Length	10 7/8	2 7/8	11 7/8	3 1/8	11 3/4	4 3/4	13 1/8	5 3/8	13 3/8	13 1/8	15 3/8	15 1/8
9" Length	17 1/8	6 1/2	18 1/8	6 3/4	16 7/8	9 7/8	18 1/4	10 1/2	13 3/8	20 3/8	15 3/8	22 3/8
19" Length	25 5/8	11 3/8	26 5/8	11 5/8	23 7/8	16 7/8	25 1/4	17 1/2	13 3/8	30 1/4	15 3/8	32 1/4
39" Length	42 3/4	21 1/4	43 3/4	21 1/2	37 3/4	30 3/4	39 1/8	31 3/8	13 3/8	50	15 3/8	51 7/8

All dimensions in inches.

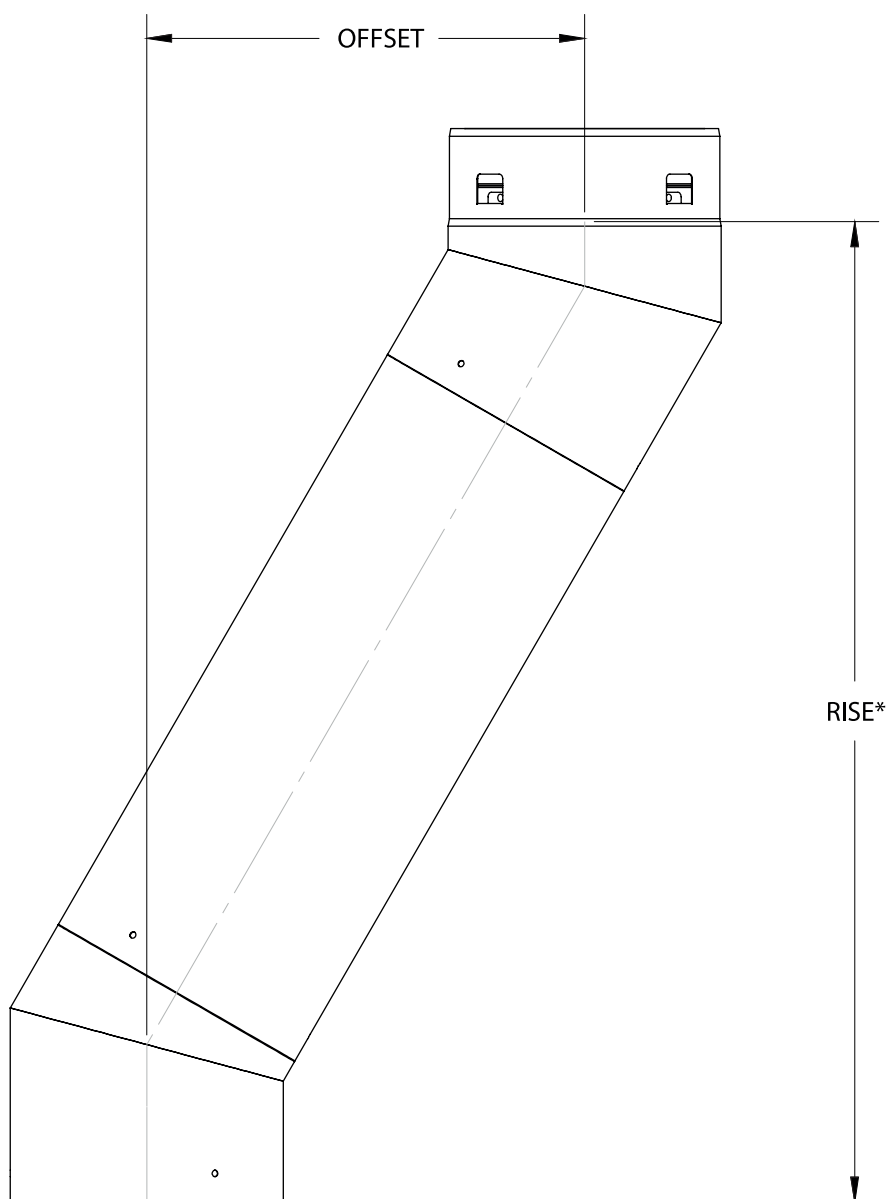

*Joint overlap is subtracted to show installed rise dimensions.

WARRANTY STATEMENT

- UL103HT RATED PRODUCTS - CCC

CROWN CHIMNEY CONNECTOR

Jeremias Inc. ("Jeremias") provides the following Limited Warranty (collectively the "Limited Warranty") for products covered by this installation instruction (collectively, the "Products"):

FOR PRODUCTS PROVEN DEFECTIVE:

- For a period of five (5) years from the original installation: Jeremias will provide replacement products with similar or like quantity of available Jeremias products, free of charge.
- From the sixth (6) through ten (10) years Jeremias will provide replacement products at a cost of 75% from the Manufacturers Suggested List Price in effect on the date the claim is received.
- From eleven (11) year term through fifteen (15) years, Jeremias will provide replacement products at a cost of 50% from the Manufacturers Suggested List Price on the date the claim is received.
- Termination caps have a Limited Warranty period of 5 years at 100%.

LIMITED WARRANTY CONDITIONS:

- Products must have been properly selected, sized, and professionally installed in strict accordance with this installation instruction. For the purposes of this warranty, professional installation would include those with Industry certification (CSIA, NFI, WETT), licensed contractors, or those able to document their installation compliant with this instruction beyond any reasonable doubt.
- Products must be unmodified, and the installation must be compliant and approved with all appliance instructions, and all local and national building codes.
- Products must have documentation of appropriate maintenance, periodic safety inspections and service conducted consistent with this installation instruction.
- Products were at all times operated and maintained in full compliance with Jeremias' operation and maintenance instructions as published at the time of installation.

EXCLUSION OF LIMITED WARRANTY

The Limited Warranty shall not cover (i) damages to: wear parts, e.g. seals; demonstration units; paintwork; moving parts, including but not limited to compensators, flue gas dampers, draught regulators, doors, minor Product deviations / wear and tear which do not effect safety / functionality; or (ii) damages caused by: contamination of ambient air or combustion air, improper fuel selection including biofuels such as switchgrass / corn, treated lumber, high moisture level (>20%), household trash / garbage, (iii) damages from willful negligence, force majeure including but not limited to flood, fire / frost, acts of God and Nature. This Warranty applies only to Jeremias Inc manufactured products.

REMEDIES

If a valid Limited Warranty claim arises, Jeremias shall, at its sole discretion, either repair the Product or deliver a properly functioning Product. This Limited Warranty is limited to repair or replacement of the Product plus shipping cost to the location of the defective Product. The Limited Warranty does not cover labor costs for removal or replacement of the defective Product.

FILING OF A LIMITED WARRANTY CLAIM

If Purchaser believes that there is a justified Limited Warranty claim, Purchaser shall notify Jeremias to that effect in writing. Such notification shall include a description of the defect, original proof of purchase, and all supporting information relating to Conditions and Exclusions above.

NO OTHER WARRANTY

Except as set forth expressly therein, Jeremias makes no warranties, either express or implied, regarding the products, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. This warranty provides no cash surrender value, and the terms and conditions may not be modified, altered or waived by any action, inaction, or representation except upon the express written authority of an officer of Jeremias.

DAMAGES DISCLAIMER AND LIMITATION

In no event shall Jeremias be liable to any client or any other person for any (A) Indirect, incidental, consequential or punitive damages, including loss of profit or goodwill or (B) Direct damages to body, health, or property for any matter arising out of or relating to the products, whether such liability is asserted on the basis of contract, tort, or otherwise even if Jeremias has been advised of the possibility of such damages. In no event shall Jeremias' total aggregate liability for damages exceed the greater of the amount of (A) Total compensation paid by purchaser to Jeremias for the products, or (B) Proceeds available from any insurance policy in effect and applicable to the event giving rise to such liability.

NOTICE

Any notice or other communication hereunder to Jeremias shall be sent postage prepaid, by certified mail, by courier such as United Parcel Service or e-mail, to the following:
Jeremias Inc., 1255 Kennestone Circle, Suite 15, Marietta, GA 30066
E-mail: Info@JeremiasInc.com.
Notices shall be effective upon receipt.

TERMS AND CONDITIONS OF SALE

Purchasers' Terms and Conditions of Sale as currently in effect shall govern these Limited Warranties, including without limitation the rights and responsibilities granted hereunder.

Jeremias' Warranty and Terms & Conditions apply.
Visit: <https://jeremiasinc.com>

NOTES

[illegible]

crown

HEARTH SYSTEMS

APPROVALS & CERTIFICATIONS



The expert in your area:

Crown Hearth Systems
1255 Kennestone Circle, Suite 150
Marietta, GA 30066
Phone: (678)-388-2740
Info@jeremiasinc.com
crownhearth.jeremiasinc.com